

# Flexible photovoltaic panels

HIGH EFFICIENCY MONOCRYSTALLINE



## More energy each day

Thanks to the use of low metallization cells which allow a better efficiency of the panel



## Flexible

Adapt to all surfaces, even curves



## High resistance and Walk on panels

Possibility of walking on panels thanks to the use of high resiliency techno-polymers



## Microcracking managing

Thanks to the new G Wire technology with highly conductive silver alloy contacts



## Light & thin

1/8 weight respect to standard glass panels, just 1.5 mm thin



## High resistance to marine environment

Certified IEC 61701:2011 against salty mist




## Easy to be integrated

Using adhesive, eyelets, tenax and zip



## Made in Europe

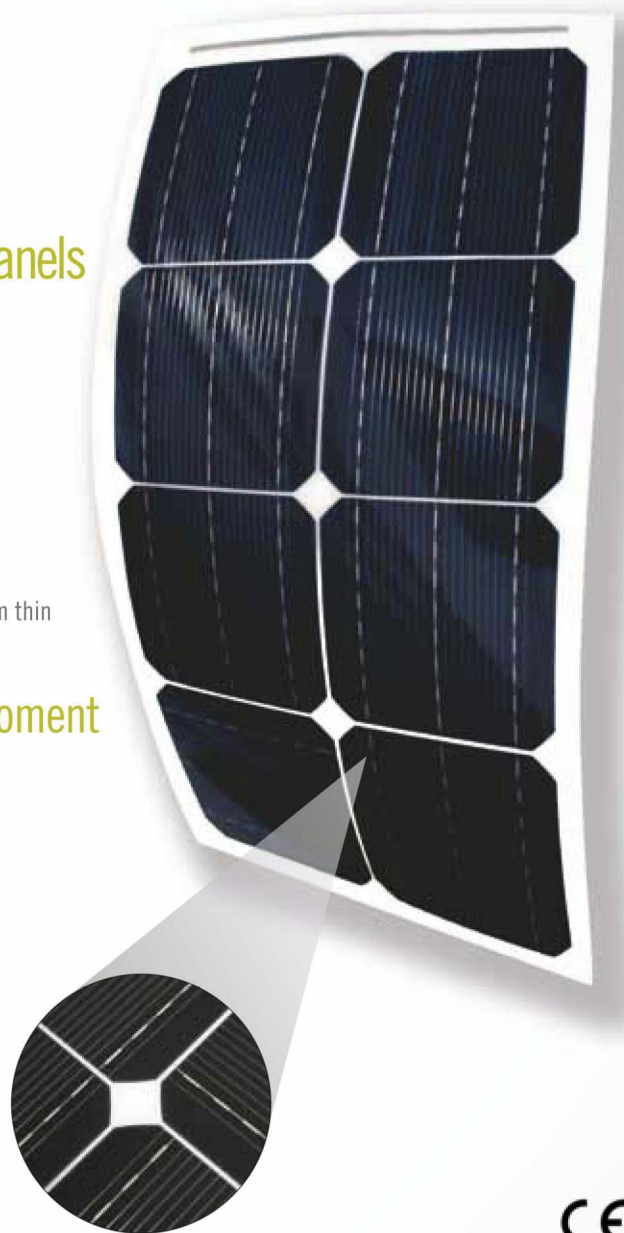

**enea** has developed a type of flexible photovoltaic panel realized with the new G Wire technology with highly conductive silver alloy contacts; these products are made of techno-polymers which give them a higher efficiency and a weight of about 1/8 compared to the traditional glass panels.

The specific contacting methodology, together with the use of photovoltaic monocrystalline cells with high efficiency, has led to realize one of the most efficient flexible solar panel in the world.



IEC 61701:2011  
Saline mist



IEC 61215  
10.17



powered  
by KIWA



Contact us: [enea@eneagrupo.com](mailto:enea@eneagrupo.com)

Visit us: [www.eneagrupo.com](http://www.eneagrupo.com)

Energy. Water. Environment. Global Sustainable Solutions.





Electrical characteristics	TXM170	TXM150	TXM95	TXM85	TXM75	TXM75Q
V P <sub>MAX</sub> (V)	20,88	18,56	11,60	10,44	9,28	9,28
I P <sub>MAX</sub> (A)	8,16	8,16	8,25	8,16	8,16	8,16
P <sub>MAX</sub> (Watt)	170,38	151,45	95,64	85,19	75,72	75,72
VCA (V)	23,4	20,80	13,00	11,70	10,40	10,40
ICC (I)	8,45	8,45	8,54	8,45	8,45	8,45
EFFICIENCY %	16,62	16,44	16,22	15,91	15,74	15,70
Dimensions	TXM170	TXM150	TXM95	TXM85	TXM75	TXM75Q
H (mm)	1530	1375	890	1530	1375	720
L (mm)	680	680	680	360	360	680
S (mm)	1,5	1,5	1,5	1,5	1,5	1,5
WEIGHT (Kg)	2,6	2,31	1,45	1,34	1,21	1,21

#### TEMPERATURE COEFFICIENTS

VCA (V)	-0,330%/°C
POT (WP)	-0,46%/°C
ICC (A)	+0,036%/°C
NOCT	42° C

#### LIMIT VALUES

SYSTEM VOLTAGE	600 V DC
OVER-CURRENT PROTECTION	15 A
TEMPERATURE RANGE	-40° TO +90° C

## Fixing options



Structural  
bi-adhesive



Tenax



Stainless  
steel eyelets



Zip

Contact us: [enea@eneagrupo.com](mailto:enea@eneagrupo.com)

Visit us: [www.eneagrupo.com](http://www.eneagrupo.com)

Energy. Water. Environment. Global Sustainable Solutions.

